


# RLX200/RMX200 - Extension cable reel RLX200/RMX200 (set)

## up to 2x200m

Pipes, which cannot be reached easily can be inspected from the inspection vehicle by using this set of reels.

The set consists of a modified RLX200 cable reel and a modified RMX200 cable reel with up to 200m camera cable each. The manual cable reel RLX200 serves as an extension reel for the manual cable reel RMX200. The control panel is connected to the RLX200 and the crawler to the RMX200.

Using a switch the RMX200 can be used either in extension reel mode or in stand-alone mode. Both manual reels are made for portable applications and ensure high stability.

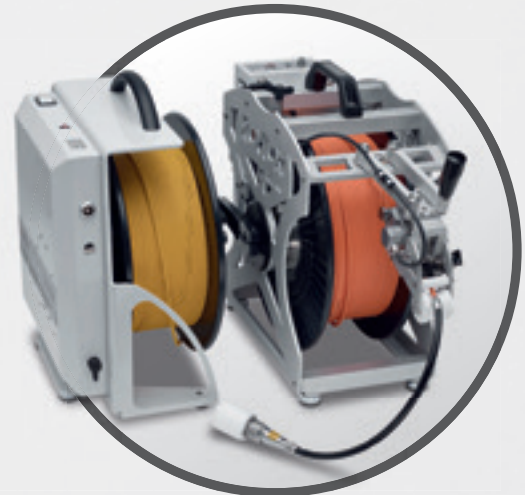

| TECHNICAL DATA               | RMX200             | RLX200             |
|------------------------------|--------------------|--------------------|
| Drive                        | manual             | manual             |
| Cable length                 | max. 200 m         | max. 200 m         |
| Meter counter                | 1                  | —                  |
| Integrated deflection pulley | yes                | yes                |
| Power supply:                |                    |                    |
| Voltage                      | 230 VAC / 115 VAC  | 230 VAC / 115 VAC  |
| Frequency                    | 50 Hz / 60 Hz      | 50 Hz / 60 Hz      |
| Electrical current           | 2 A / 4 A          | 2 A / 4 A          |
| Ambient temperature range    | 0 °C - 40 °C       | 0 °C - 40 °C       |
| Storage temperature range    | 0 °C - 40 °C       | 0 °C - 40 °C       |
| Dimensions (L x W x H)       | 315 x 495 x 680 mm | 424 x 460 x 245 mm |
| Weight                       | 27 kg              | 23 kg              |

#### RMX200:

- 200 m armored camera cable
- Meter counter
- Adjustable brake
- Hand crank
- Winding support
- Telescopic bar with control panel mount
- Switch extension reel mode / stand-alone mode
- Connector for RLX200 (or for control panel in stand-alone mode)

#### RLX200:

- 200 m armored camera cable
- Adjustable brake
- Hand crank
- Winding support
- Connector for control panel
- Stand-alone mode not possible (no meter counter / crawler connector available)



**iPEK International GmbH** · See, Gewerbepark 22 · 87477 Sulzberg · GERMANY

☎ +49 8376 921 800 📠 +49 8376 921 8021 ✉ isg\_info@idexcorp.com 🌐 www.ipek.at

---

Issue: July 2015 – subject to changes.