


RMX200 - Manual cable reel up to 200 m

The cable reel holds max 200 m of armored camera cable and offers winding support that the camera cable is wound up quick and clean to the cable reel. Additionally, you can mount your operating panel to the optional telescope bar during an inspection.

TECHNICAL DATA - RMX200

Drive	manually
Cable length	max. 200 m
Meter counter	1
Integrated deflection pulley	yes
Large deflection pulley	no
Power supply:	
Voltage	230 VAC / 115 VAC
Frequency	50 Hz / 60 Hz
Electrical current	2 A / 4 A
Fuses	-
Protection class	-
Ambient temperature range	0 °C - 40 °C
Storage temperature range	0 °C - 40 °C
Dimensions (L x W x H)	315 x 495 x 680 mm
Weight (incl. cable)	30 kg

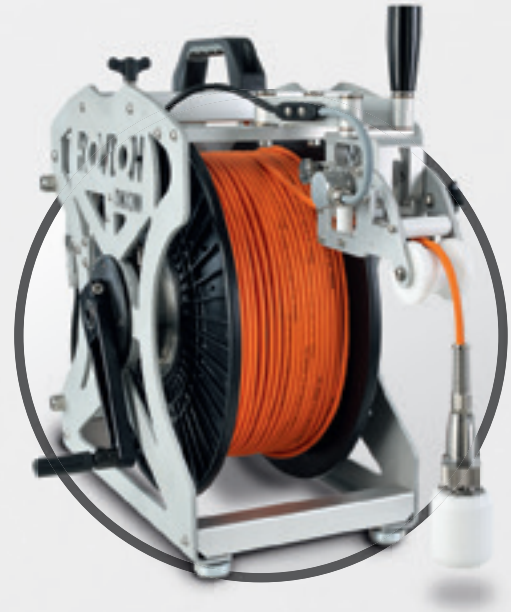

- Max. 200 m armored camera cable
- Adjustable brake
- Hand crank
- Dirt wiper
- Winding support
- Telescopic bar with control panel mount



iPEK International GmbH · See, Gewerbepark 22 · 87477 Sulzberg · GERMANY

☎ +49 8376 921 800 📠 +49 8376 921 8021 ✉ isg_info@idexcorp.com 🌐 www.ipek.at

Issue: July 2015 – subject to changes.